

Sealite's Barrier Floats provide a reliable marking solution to restrict boating traffic from dangerous areas, such as spillways, dams, swim areas, and other exclusionary zones.

Key Features:

- UV-stabilized low density polyethylene (LDPE)
- Seamless, single piece design
- Molded-in pipe across the length (HDPE or galvanized)
- Optional swivel ends



SL-BF-2436-S
24" diameter x 36" length
(Shown with optional swivel ends)



SL-BF-1830
18" diameter x 30" length



SL-BF-15-S
15" diameter round
(Shown with optional swivel ends)

Rotationally Molded UV-Stabilized Polyethylene

Sealite's patented rotational molding process delivers a single piece design for longevity and performance. The SL-BF Series form a seamless barrier float of 0.2 inches (5mm) wall thickness.




Available in Three Sizes and Configurations

Sealite's Barrier Floats are available in three sizes:

- 15-inch round
- 18 x 30 inch oval
- 24 x 36 inch oval

Optional accessories include:

- Swivel ends
- Alternative colors (yellow, white, red, green)
- Bands of USCG approved retroreflective tape

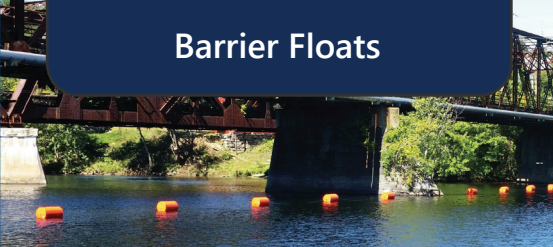

SL-BF-15

SL-BF-1830

SL-BF-2436

General Characteristics

Available Colors	Orange, Yellow, White, Red, Green		
Total Float Volume (gallon/liter)	7.5 / 29	26.5 / 100	56.5 / 21.4
Total Reserve Buoyancy (lb/kg)	53 / 24	174 / 79	370 / 168

General Characteristics

Material	Rotationally-mold low density UV-stabilized virgin polyethylene		
Wall Thickness (in/mm)	0.2 / 5		
Length (in/mm)	15 / 382	30 / 762	36 / 914
Diameter (in/mm)	15 / 382	18 / 457	24 / 610
Net Weight (lb/kg)	10 / 4.5	21 / 9.5	39 / 17.5
Product Life Expectancy	Up to 12 years		








Compliance

IALA	Surface colors compliant to IALA E-108
Quality Assurance	ISO 9001:2015

Intellectual Property

Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd		
Warranty *	1 year		
Available Options	Swivel ends Pipe through swivel at bottom eye only	Swivel ends	Swivel ends
Terms and Conditions	Specifications subject to change or variation without notice. Please refer to product installation manual for further specifications. Warranty Terms and Conditions available at www.sealite.com .		


SL-BF Series Options

Model Number	Float Style	Description
SL-BF-15		1/2" galvanized pipe thru float molded in
SL-BF-15-S		1/2" galvanized pipe thru float molded in with swivels at each end
SL-BF-15-BE		1/2" galvanized pipe thru float molded in with swivel at one end
SL-BF-1830		1 1/4" HDPE pipe thru float molded in
SL-BF-1830-S		1 1/4" HDPE pipe thru float molded in with swivels at both ends
SL-BF-2436		1 1/4" HDPE pipe molded in
SL-BF-2436-S		1 1/4" HDPE pipe molded in with swivels at both ends


Technical Illustrations

SL-BF-15-S


(Shown with optional swivel ends)

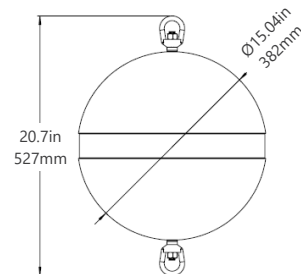

SL-BF-1830

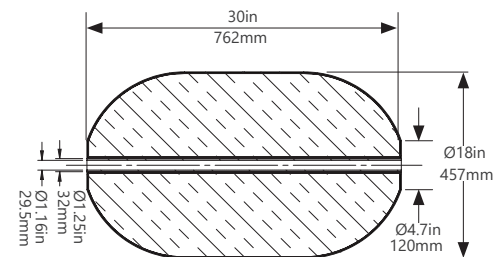

SL-BF-2436

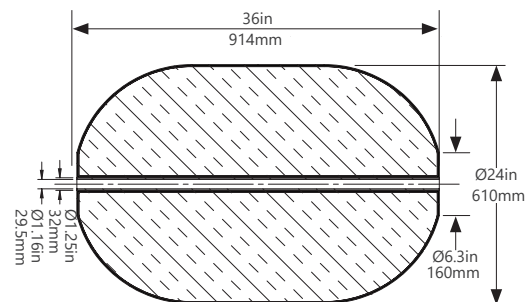

Order Sealite's cable and mooring equipment to complete your order!