



MARINE SUPPLIES · WORLDWIDE FRS

## MARINE HOSE- MED SINFLEX



### SINGLE JACKET, PVC LINER

The Marine hose is characterised by its light-weight, flexible and low friction loss. It is a multi-purpose hose suitable for a wide range of applications.

#### Standards:

- > EN 14540:2014 certified
- > MED SOLAS certified

#### Characteristics:


- > Light weight
- > Good flexibility
- > High elasticity
- > The liner process produces an amazingly thin but smooth inner waterway
- > Extreme low friction loss
- > Temperature range from -10°C to 55°C (14°F to 131°F)




PIRAEUS · ROTTERDAM · HOUSTON · LIMASSOL · SINGAPORE · DUBAI · SUEZ · BARCELONA



## Construction

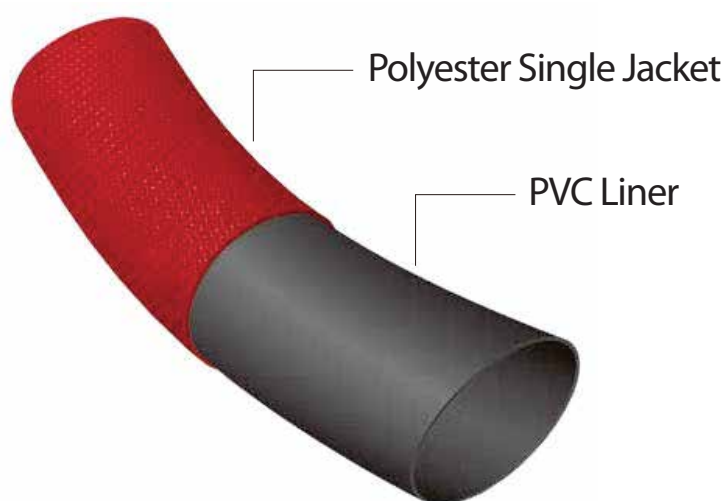

## Technical Data

Nominal Size		Working Pressure		Test Pressure		Burst Pressure		Certification
inch	mm	psi	bar	psi	bar	psi	bar	
1-1/2"	38	218	15	348	24	652	45	
2"	52	218	15	348	24	652	45	
2 1/2"	64	218	15	348	24	652	45	CCS

\* Fire hose with 2.5" inch/64mm inner diameter, are not under the provisions of MED Directive.

6-8 Almiridos Str., 18540 Piraeus, Greece **tel.** 0030 210 4225930   

info@poseidonms.com · www.poseidonms.com